



PCT/GB 2003 / 001013
PCT/PTO 13 SEP 2004

INVESTOR IN PEOPLE

REC'D 19 MAY 2003

The Patent Office

Concept

EWING

PCT

Cardiff Road

Newport

South Wales

NP10 800

**PRIORITY
DOCUMENT**

SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1(a) OR (b)

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

I also certify that the attached copy of the request for grant of a Patent (Form 1/77) bears an amendment, effected by this office, following a request by the applicant and agreed to by the Comptroller-General.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed

M. C.

Dated 15 April 2003

BEST AVAILABLE COPY

Patents Form 1/77

Patents Act 1977

Request for grant of a patent
Grant

THE PATENT OFFICE
C
13 MAR 2002
NEWPORT

The Patent Office

1/77
POL/TMO 0.00-020391.3

The Patent Office
Concept House
Cardiff Road
Newport
Gwent NP10 8QQ

1. Your reference

2227-P101-GB

2. Patent application number

0205891.5

New

3. Full name, address and postcode of the or of each applicant (*underline all surnames*)

REMOTE CONTROLLED LIGHTING LIMITED
8 The Business Centre
Elm Grove
London SW19 4HZ
United kingdom

8342974001

Patents ADP number (*if you know it*)

If the applicant is a corporate body, give the country/state of its incorporation

United Kingdom

4. Title of the invention

A Lighting Unit

5. Name of your agent

ATKINSON BURRINGTON & Partners Limited

"Address for service" in the United Kingdom to which all correspondence should be sent

25-29 President Buildings Norwich
President Way
Sheffield S4 7UR
GB
Research Park
Colney
NORWICH
Norfolk NR4 7UT
as per SITT 03/03

Telephone No:

0114 275 2400

Patents ADP number

7807043001

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (*if you know it*) the or each application number

Country

Priority application number
(*if you know it*)

Date of filing
(day/month/year)

N/A

N/A

N/A

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing
(day/month/year)

N/A

N/A

8. Is a statement of inventorship and of right to grant of a patent required in support of this request?

Yes

Patents Form 1/77

Patents Form 1/77

BEST AVAILABLE COPY

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form

Description

24

Claim(s)

06

Abstract

00

Drawings

14 + 14

10. If you are also filing any of the following, state how many against each item.

Priority documents

N/A

Translations of priority documents

N/A

Statement of inventorship and right to grant of a patent (*Patents Form 1/77*)

None

Request for preliminary examination and search (*Patents Form 9/77*)

None

Request for substantive examination (*Patents Form 10/77*)

None

Any other documents
(Please specify)

- 11.

I/We request the grant of a patent on the basis of this application.

Signature

Date Tuesday, 12 March 2002

12. Name and daytime telephone number of person to contact in the United Kingdom

RALPH ATKINSON CPA
0114 275 2400

A Lighting Unit

The present invention relates to a lighting unit, and a lighting system comprising a number of said lighting units.

5 It is well known to have lighting systems comprising a number of lighting units which allow the orientation of individual lamps to be adjusted, so that a required lighting effect can be obtained. Conventionally, the orientation of such lighting units has been adjustable manually, but this can be physically demanding and time consuming. Technology exists to allow this adjustment
10 to be automated and controlled remotely. However, there are problems in producing such an automated system that has a simple and flexible means for selecting individual lamps for adjustment.

According to a first aspect of the present invention there is provided a lighting unit comprising: a number of individually moveable lamps; motor
15 means configured to adjust the position of said lamps; controlling means configured to transmit drive signals to said motor means in dependence upon received control signals; and for each one of said lamps, a corresponding light detector, connected to said controlling means such that receipt of modulated light at one of said light detectors provides an indication to said
20 controlling means that the position of the corresponding lamp is to be adjusted.

The invention will now be described by way of example only, with reference to the accompanying drawings, in which;

Figure 1 shows a lighting system comprises two lighting units and a
25 portable remote control unit;

Figure 2 shows the remote control unit of Figure 1 in more detail;

Figure 3 shows an alternative remote control unit to that of Figure 2;

Figure 4 shows schematically the main components of the remote control unit of Figure 2;

5 *Figure 5 shows an isometric view of the lighting unit 101 of Figure 1;*

Figure 6 shows the lighting unit 101 of Figure 1, removed from the lighting track;

Figure 7 shows the general physical layout of components within the body of lighting unit 101;

10 *Figures 8A and 8B show the tachometer disc 712 and optical sensor 714 in a side view and an end view respectively;*

Figure 9A and 9B show the home flag 715 and corresponding sensor 716 in a side view and an end view respectively;

15 *Figure 10 shows the main electrical and electronic elements of the lighting unit 101;*

Figure 11 shows a flow-chart outlining the operation of the micro-controller of the lighting unit 101;

Figure 12 shows, in further detail, the step 1104 of responding to control signals received from the infrared detector;

20 *Figure 13 shows, in further detail, the step 1106 of responding to "position-select" control signals;*

Figure 14 shows schematically the main components of an alternative remote control unit to that of Figure 4; and

25 *Figure 15 shows schematically the main electrical and electronic elements of an alternative lighting unit, suitable for receiving commands from the remote control unit of Figure 14.*

Figure 1

A lighting system is shown in *Figure 1*. The lighting system comprises two lighting units **101** and **102** and a portable remote control unit **103**. The lighting units **101** and **102** are alike, and each have a lamp housing, **111** and **112** respectively, which house lamps **121** and **122** respectively. The lamps in this example are halogen PAR36 lamps. However, other electric lamps which are capable of producing a beam of light may be used.

The lighting units **101** and **102** are attached to a conventional lighting track **104** from which they receive mains electricity. The lighting track **104** is itself mounted to the ceiling of the room that is occupied by the system's human operator **105**. The lighting system is suitable for illuminating any area where directed light is desired. For example the system is suitable for dining areas, art galleries etc. As will be understood from the following description, the operator **105** requires little technical understanding in order to adjust the lighting within the room.

The light units **101** and **102** each contain electric motors by which they are capable of individually panning and tilting their respective lamps. In addition, the units contain power control circuitry allowing the power supplied to their lamps to be individually varied, i.e. the lamps may be dimmed, or switched off. The panning, tilting and dimming of each lamp is controlled by the operator **105** using the remote control unit **103**.

In order to effect communication between the remote control unit **103**, and the lighting units **101** and **102**, the remote control unit emits two distinct types of radiation, and the lighting units have sensors which are arranged to detect these types of radiation. The first radiation type is modulated light, and

in the present example this takes the form of modulated laser light. The second radiation type in the present embodiment is modulated and coded infrared.

5 The two types of radiation have two distinct uses. The narrow beam of light is used by the operator to select a particular lamp which is to be adjusted. On selection of a lamp, the relevant lighting unit enters an activated mode in which it will receive and respond to commands received via the coded infrared. The infrared is therefore used to transmit command codes to a selected lighting unit regarding a lamp's movement, position, dimming etc.

10 For example, in order to adjust the orientation of a chosen lamp, in this case either the lamp 121 or 122, firstly the lamp has to be selected, thus putting the relevant lighting unit into the activated mode. To do this, the operator presses a button on the remote control unit 103, which results in the remote control unit generating a narrow beam of modulated light. In this
15 example, the remote control unit 103 contains a laser diode which it uses to generate the light beam. This modulated light beam is directed by the operator 105 onto a light detecting sensor located on the under side of the chosen lighting unit. On receiving the modulated light at the sensor, the lighting unit illuminates a green light emitting diode (LED) to indicate to the
20 operator that the lamp has been selected, and the lighting unit enters its activated mode.

Thus, the beam of light used to select a lamp has to be sufficiently narrow so that it may be shone onto a particular sensor without illuminating other light sensors corresponding to neighbouring lamps.

25 On observing the illuminated green LED, the operator then selects and presses a second button on the remote control. By pressing the relevant

button, the operator may command the lighting unit to pan the selected lamp clockwise or anticlockwise, tilt the lamp up or down, dim the lamp up or down, or switch the lamp off or on. While adjusting the position of the lamp, the task is usually made easier if the operator can observe the beam produced by the lamp rather than the lamp itself. For example if the lighting unit is used in an art gallery, the operator may watch the beam of light as it is moved towards a sculpture. For this reason, the infrared transmitted by the remote control unit 103 is a broad beam, allowing the operator to make adjustments without having to be too accurate when pointing the remote control towards the lighting unit.

It should be noted that the two lighting units are manufactured to be indistinguishable, and are arranged to receive and respond to the same modulated light as each other, the same infrared as each other, and the same codes carried by the infrared as each other. Nevertheless, because each lamp is selectable by the modulated laser light, the movement and brightness of each lamp is individually controllable.

Furthermore, it may now be understood, that if there was requirement for additional lighting units, then units similar to units 101 and 102 may be connected to the lighting track, or another lighting track within the room, and operated on an individual basis using the same remote control. This is done without the need for rewiring or reprogramming of the lighting units or the remote control unit 201, because all lighting units, such as 101, of a system respond to the same type of modulated light and the same infrared codes. I.e. the lighting units do not have to be programmed with an identity code which identifies them before being installed within a system. Therefore, the lighting system may be expanded to include an unlimited number of such

lighting units.

In addition to controlling lamp movement etc., by pressing another button on the remote control unit **103**, the operator is also able to store information defining the current orientation of the lamp, or move the lamp to a position defined by stored information. For example, the operator **105** may frequently require the lamp **121** to be repositioned to one or more particular orientations, and thus, having positioned a lamp in an orientation which is considered useful, the operator may command the lighting unit to store information defining this orientation. Then, in the future, when that same orientation is required again, the operator may command the lighting unit to recall the stored information and thus cause the lighting unit to move the lamp to said orientation.

Figure 2

The remote control unit **103** of *Figure 1* is shown in detail in *Figure 2*. The remote control unit **103** is of a size and weight which allows it to be easily carried by hand. The laser diode (not shown in *Figure 2*) and the infrared LED (not shown in *Figure 2*) are mounted at a front end **201** of the remote control unit, so that when energised, their respective beams extend forward from said front end. The remote control unit **103** has a single button **202** which is depressed to energise the laser diode, and is held down while the operator directs the laser beam onto the sensor of a chosen lamp. Located adjacent to button **202** there is a button **203** for panning clockwise, a button **204** for panning anticlockwise, a button **205** for tilting up, and a button **206** for tilting down. In addition, there are buttons for dimming up, **207**, dimming down, **208**, and switching the lamp on and off, **209**.

Therefore, if the orientation of any chosen lamp is to be adjusted, the operator simply presses the laser button **202** and directs the laser beam at the sensor corresponding to the chosen lamp, then having observed from the lighting unit's LED that it has been selected, the operator presses the relevant one of the four positioning buttons **202** to **205**.

The remaining four buttons **210**, **211**, **212** and **213**, on the upper surface of the remote control unit **103**, are concerned with the storing and recalling of useful lamp orientations and dimmer settings. The remote control unit also has a liquid crystal display (LCD) **214** which facilitates the use of these four buttons. The lighting units **101** and **102** are each capable of storing information defining twenty-three different lamp orientations/dimming control settings. Therefore, when a lamp has been manoeuvred to a useful position, which is to be stored, the operator must first select a number between one and twenty-three that will identify that position. This number selection is carried out by depressing a pre-set up button **210** or a pre-set down button **211**, as appropriate. Depression of these buttons causes the number displayed by the LCD **214** to increase and decrease, respectively, within the range one to twenty-three. When the desired number is selected and displayed by the LCD **214**, the operator then presses the record pre-set button **212**. This action has the effect of putting the controller in a record mode. The operator then presses a send-pre-set button **213** which causes the remote control unit **201** to transmit coded infrared to the currently activated lighting unit, commanding the unit to store information defining its present orientation and dimmer control setting within its memory location that is identified by the selected number.

Having stored positional data in this way, the operator may then reposition a chosen lamp by firstly selecting the lamp by means of the laser, selecting the stored position by selecting the relevant number using the buttons 210 and 211 and LCD 214, and then pressing the send-pre-set button 213. On pressing button 213, the remote control unit 201 transmits coded infrared which commands the lighting unit to recall positional data, and dimmer control data, from its relevant memory location, and then to move the selected lamp to the defined position and adjust the dimmer setting as required.

The lighting units 101 and 102 are configured to receive infrared code even when they have not been selected by modulated light, but until a lamp of a lighting unit has been selected, the lighting unit will not respond to received commands. As well as being selected by receiving the modulated light, a lamp is selected when the infrared sensor of a light unit receives a "select-all" code. Because the infrared is transmitted as a relatively wide angled beam, this means that several, or all, lighting units may be selected at once. The lighting units are configured such that if they are selected in this way, they will respond to commands to recall positional data from their memory, and move their lamp to the relevant pre-defined position.

For this purpose, a pair of "select-all" buttons 215 and 216 are located on opposing sides of the remote control unit 103. When the "select-all" buttons 215 and 216 are pressed simultaneously, the remote control unit 103 transmits a "select-all" code by means of its infrared LED.

Therefore, for a particular lighting arrangement, the operator 105 may store positional data for each lighting unit on an individual basis within, for example, memory location number 10. Then, when the same lighting

arrangement is required again, the operator may select all of the lighting units by pressing "select-all" buttons **215** and **216**, then select the number 10 on LCD **214** before pressing the send-pre-set button **213**. Thus, all lighting units can be made to return to pre-set positions simultaneously.

5 In an alternative lighting system, the lighting units are configured to store ten sets of positional data and dimmer setting control data in memory locations identified as one to ten. However, other memory locations are used to store time intervals relating to movement sequences. For example, a memory location identified as "11" may store a time interval of 10 seconds while a memory location "12" may store a time interval of twenty seconds, etc. If such a lighting unit then receives a command from a remote control unit to recall pre-set data "11", it interprets such a command as a command to step through a number of stored positions. The lighting unit retrieves the time period of ten seconds from memory location "11", it then retrieves data from memory locations one to ten and moves the lamp through the corresponding positions, with a ten second delay between each movement. Similarly, if a recall pre-set data "12" command is received, the lamp is again stepped through positions defined by data in memory locations one to ten, but this time with a twenty second delay between lamp movements. By providing the lighting units with this ability to move their lamps through pre-defined positions, the system is able to produce a dynamic lighting display.

10

15

20

Figure 3

An alternative remote control unit **301** to that of *Figure 2* is shown in *Figure 3*. The appearance of remote control unit **301** is similar to unit **103**, except that it does not have a LCD, or the four buttons used for storing and

25

recalling positional data, or the "select-all" buttons. Therefore, it only has a laser activation button 302, four movement control buttons 303, 304, 305, and 306, dim-up button 307, dim-down button 308 and on/off button 309, which have similar functions to the corresponding buttons 202 to 209 of unit 103.

The remote control unit 301 may also be used with the lighting system of *Figure 1*, ie with lighting units such as 101 and 102, in instances where a less sophisticated controller is required. For example, the operator 105 may be responsible for setting up pre-set positions and so uses remote control unit 103, while other operators, who may be less skilled, use the simpler control unit 301 to make adjustments to individual light units.

Figure 4

The main components of the remote control unit 103 of *Figure 2* are shown schematically in *Figure 4*. The remote control unit 103 comprises an eight bit RISC-like micro-controller 401, which has in built program memory PROM (programmable read only memory) containing the unit's operating instructions, and one hundred and sixty bytes of in built RAM (random access memory). A suitable micro-controller is sold by Holtek as part number HT48R50A-1. The micro-controller 401 receives inputs from button switch array 402 comprising the fourteen buttons 202 to 213, 215 and 216. In dependence of received inputs from the button array the micro-controller provides suitable output signals to the LCD 214, the laser diode module 403 or the infrared LED 404.

The laser diode module 403 in the present example is an LM-01 laser module sold by Eubon Technology Co. Ltd. and during operation it receives a

signal from the micro-controller 401 causing it to switch on and off at a frequency of one kHz (kilo-Hertz). I.e. it transmits laser light modulated at a frequency of one kHz.

The infrared LED 404 is a sold by Vishay as IR LED type TSUS540.
5 The micro-controller 401 generates control signals by coding a thirty-eight kHz modulated signal, and these control signals are converted to, and transmitted as, an infrared beam by the infrared LED.

Figure 5

10 The lighting unit 101 of *Figure 1*, is shown in greater detail in the isometric view of *Figure 5*. The lighting unit comprises a body 501 connected by a drive shaft to the lamp housing, and by a second drive shaft to a lighting track connector 502. The lighting unit 101 is connected to the lighting track 104 by means of the lighting track connector 502. In this example the lighting
15 track is manufactured by Eutrac.

As well as receiving mains electricity from the lighting track 104, the connector 502 also supports the weight of the lighting unit 101. Furthermore, the connector 502, when fixed into the lighting track, provides an anchor about which the body 501 and lamp housing 112 can rotate, and thus,
20 panning of the lamp 112 is performed. Tilting of the lamp 112 is simply performed by the lamp housing rotating with respect to the body 501.

The lighting unit 101 is shown in *Figure 5* in, what is referred to as, its 'home' position, with its body parallel to the track 104 and its lamp housing directing the lamp downwards. As will be described, the lamp is arranged to
25 be able to orientate itself to the 'home' position, and stored positional data is determined with respect to this position.

A flat window 503 is located in the underside of the body 501. The window 503 is transparent to visible light and infrared light at the wavelengths transmitted by the laser diode and infrared LED of the remote control unit 103. Thus, the window 503 allows access of the laser light and infrared to sensors located behind the window.

The green LED 504 which is illuminated when the lamp 112 is selected is also located on the underside of the body 501.

In an alternative embodiment the window 503 is shaped to define a pair of lenses arranged side by side, and configured to focus incoming radiation onto the two sensors.

Figure 6

The lighting unit 101 of *Figure 1* is shown removed from the lighting track in *Figure 6*. The light unit 101 is a self contained module which can be easily connected and disconnected from a lighting track by means of its connector 502. Therefore, as described earlier, the number of such units included within a track light system may be simply adjusted. In addition, if for any reason a lighting unit requires replacement, this may be done very simply and quickly by unclipping one unit from the track and clipping in a new unit. Furthermore, because the connector 502 is of a conventional type, the lighting unit 101 may be used to replace an existing static type lighting unit within an existing lighting system, without further alteration to that system.

Figure 7

The general physical layout of components within the body of lighting unit 101 is shown in *Figure 7*. Electric cables 701 connect the terminals of the

connector 502 with power supply circuitry 702 within the body 501. The cables 701 enter the body 501 through a hollow drive shaft 703 which connects the connector 502 to the body. The power supply circuitry 702 supplies a regulated voltage to control circuitry 704, and it also contains a transformer which supplies power to the lamp 121 by means of cables which pass through a second hollow drive shaft 753.

For the purposes of simplicity and clarity, other electrical connections have been omitted from *Figure 7* but further detail of this is provided later with respect to *Figure 9*.

As described previously, the green indicating LED 504 is located in the lower wall of the body 501, and the infrared sensor 706 and the light sensor 707 are located behind window 503.

The drive shaft 703 is located within bearings so that it may be rotated with respect to the body 501, while it is rigidly attached to connector 502. Thus, in operation the body is rotated by driving the shaft 703. Shaft 703 supports a spur gear 708 which meshes with a drive gear 709 such that, on rotation of the drive gear, the shaft 703 is driven. The drive gear 709 is itself driven by an electric motor 710 via reduction gear 711. The electric motor 710 and reduction gear 711 is a single unit which is configured to rotate the drive gear 709 at approximately eight revolutions per minute when the motor receives twelve volts. In addition to providing the required torque, the gear 711 also ensures that the lamp does not pan when power has been removed from the motor 710.

A slotted tacho disc 712 is rigidly fixed to a back shaft 713 which extends from the rear of the electric motor 710. The tacho disc 712 is located within an optical sensor 714 connected to the control circuitry 704. The

optical sensor 714 supplies panning movement information to the control circuitry when the motor operates.

5 A single slotted disc 715, referred to as the home flag, is rigidly attached to the end of the drive shaft 703. A second optical sensor 716 is positioned so that the home flag rotates through it, as shaft 703 rotates. By means of the optical sensor 716 and the home flag 715, limited rotational positional information is supplied to the control circuitry, such that the control circuitry is able to rotate to shaft 703 to the home position.

10 The drive shaft 753 which is used to tilt the lamp 122, is similar to drive shaft 703, and therefore has similar, and corresponding, home flag 765, with optical sensor 766, spur gear 758, driven by drive gear 759, itself driven by electric motor 760 via reduction gear 761, electric motor back shaft 763 supporting tacho disc 762 having an associated optical sensor 764. In a similar manner to gear 711, reduction gear 761 provides the required torque
15 to tilt the lamp under the power of the motors, while preventing further tilting when the motors are not being driven.

Figures 8A and 8B

20 The tacho disc 712 and optical sensor 714 are shown in detail in the side view and end view of *Figure 8A* and *8B* respectively. The tacho disc 712, attached to back shaft 713, is a circular disc containing ten slots 801 extending radially inward from its outer edge and thus defining ten radial spokes 802. The sensor 714 comprises an LED 803 and a photodiode 804 which are positioned so as to face opposing sides of the disc 712. As the disc
25 rotates and spokes 802 pass in between the LED 803 and photodiode 804, the photodiode generates a corresponding signal which is supplied to the

control circuitry 704. Thus control circuitry 704 receives a signal which provides information of the rotation of the motor 710.

Figures 9A and 9B

5 The home flag 715 and corresponding sensor 716 are shown in detail in the side view and end view of *Figure 9A and 9B* respectively. The sensor 716 is of the same type as sensor 714, having an LED 903 and a photodiode 904, which face opposite sides of the home flag 715.

10 The home flag 715, which is fixed to the end of shaft 703, takes the form of a disc from which the outer portion has been removed from one half. Therefore, the disc has a small radius for one half 905 and a larger radius for its other half 906. The difference in the radii of the two halves is such that as the flag 715 rotates, the larger half 906 of the flag comes between the LED 903 and photodiode 904 for half of a revolution while nothing comes between
15 them for the other half of the revolution. Consequently, as the shaft rotates the photodiode supplies a voltage to the control circuit which depends upon the position of the shaft. Furthermore, two edges 717 and 718 define positions where the radius of the disc changes from the smaller to the larger radius, and by monitoring the voltage from the photodiode 904 these edges
20 are detected. The home position of the shaft 703, and hence the home position for the lighting unit is therefore chosen in respect to one of these edges.

Figure 10

25 The main electrical and electronic elements of the lighting unit 101 are shown schematically in *Figure 10*. Mains electricity, received by the track

connector **502**, is supplied to a power supply **1001** and thyristor circuit **1002**. The power supply **1001** is configured to supply suitably regulated voltages to the electronic control circuitry within the lighting unit **101**, including the micro-controller **1003**, electrically erasable programmable read only memory (EEPROM) **1004**, and driver circuitry **1005**.

The thyristor circuit **1002** is configured to control a voltage supply to a lamp transformer **1006** in response to a signal received from the micro-controller **1003**. Thus, a voltage between zero and mains voltage is supplied to lamp transformer **1006**. The lamp transformer **1006** is configured such that, when it receives mains voltage, it supplies a voltage of twelve volts to the lamp **121**, ie it supplies a voltage within the lamp's rating.

The micro-controller **1003** is an eight-bit RISC-like micro-controller designed for multiple input/output applications. A suitable micro-controller **1003** is sold by Holtek under the part number HT48C50A-1. The micro-controller **1003** has one hundred and sixty kilo-bytes of in-built random access memory (RAM). It also has programmable read only memory (PROM) containing the process instructions for the operation of the lighting control unit **101**.

The micro-controller receives signals from the optical sensors **714** and **764**, providing the micro-controller **1003** with data regarding the rotational movement of the motors **710** and **760** respectively, and signals from the optical sensors **716** and **766** which indicate to the micro-controller when the drive shafts **703** and **753** are in their home positions. The micro-controller also receives signals from the infrared sensor **706** and the light sensor **707**. The light sensor in the present embodiment is a photodiode supplied by Vishay under part number BPW34, and a suitable infrared sensor is sold by

JRC under part number NJL61V380.

The micro-controller is also able to supply signals to, and receive signals from, the EEPROM 1004. Thus, positional data and dimmer setting information may be stored on the EEPROM, and then retrieved, even after a discontinuity in the power supply. For example, during use the present dimmer setting of a lighting unit is stored in the EEPROM, so that when said lighting unit is first switched on, the last used dimmer setting can be looked up and relevant signals applied to the dimming thyristor circuit 1002.

The micro-controller 1003 is also configured to output signals to driver circuitry 1005. The driver circuitry 1005 comprises of power transistors for supplying voltages to the motors 710 and 760 in response to the signals received from the micro-controller.

Figure 11

A flow-chart outlining the operation of the micro-controller of the lighting unit 101 is shown in *Figure 11*. After receiving power at step 1101, the micro-controller 1003 retrieves the last used dimmer setting from the EEPROM 1004 and supplies corresponding signals to the thyristor circuitry 1002 at step 1102, thus causing the thyristor circuitry to supply the required power to the lamp 121. Thus, when the lighting unit first receives power, the lamp of the lighting unit is switched on with the dimming setting which was used just before the lighting unit was switched off. At step 1103, a question is asked as to whether a correctly modulated signal, ie a one kHz modulated signal, has been received from the photodiode 707. If this question is answered yes, the micro-controller responds to subsequent control signals received from infrared detector 706 at step 1104, before entering step 1105.

Otherwise, if the question at step 1103 is answered no, then step 1105 is entered directly.

At step 1105, a question is asked as to whether a "select-all" code has been received from the infrared detector 706. If this question is answered no, the process re-enters step 1102 directly. If this question is answered yes, then the process enters step 1106 before re-entering step 1102. At step 1106, the micro-controller 1003 responds to "position-select" control signals received from the infrared detector 706. These signals cause the micro-controller to retrieve position data and dimmer setting data stored in EEPROM 1004 and control the lamp's position and power setting in a corresponding manner.

Thus, the micro-controller can be activated by the photodiode, to respond to infrared control codes on an individual basis at step 1103, or activated by the infrared detector to respond, as part of a group, with micro-controllers of other lighting units at step 1105.

Figure 12

The step 1104 of responding to control signals received from the infrared detector is shown in further detail in *Figure 12*.

The micro-controller 1003 is configured to respond to control signals, received via the infrared detector, after modulated light has been received at the photodiode at step 1103. However, if control signals are not received for a pre-defined period of time, then the micro-controller is configured such that it will not respond to control signals again, until it has been re-activated at step 1103. Therefore, in order to monitor how recent control signals have been received, at step 1201 a timer is started.

A question is then asked at step **1202** as to whether a movement control signal has been received. If a movement control signal has been received, the process enters step **1203** in which drive signals are transmitted to the relevant motor until a movement control signal is no longer received from the infrared detector. When the movement control signals are no longer being received, the drive signals are stopped. In addition, the timer started at step **1201** is re-started before step **1204** is entered.

If it is determined at step **1202** that a movement control signal has not been received then the process enters step **1204** directly. At step **1204** a question is asked as to whether a control signal relating to dim up, or dim down, or on, or off has been received. If such a signal has been received, corresponding signals are transmitted to the dimming thyristor circuit **1002** at step **1205**, and the timer restarted before step **1206** is entered. Otherwise, step **1206** is entered directly from step **1204**.

At step **1206** it is determined whether a control signal has been received from the infrared sensor, commanding that data defining the current position should be stored. If there has not, then step **1210** is entered directly, but if there has, then step **1207** is entered.

At step **1207** it is determined whether the current orientation of the lamp is known. The position of the lamp is only known if the lamp has been put in the home position since power-on, at step **1101**. This is because the position of the lamp is calculated from movement data received from optical sensors **714** and **764** since the last time the lamp was in the home position. If the lamp's current position is known, then step **1209** is entered directly, but if it is not known, then the process first enters step **1208** before entering step **1209**.

At step 1208, under the control of the micro-processor, signals are supplied to the motors until the home position is reached. By monitoring the data from sensors 714 and 716 during this movement, data defining the "current position" is found. After determining the "current position" data, the lamp is moved back to the "current position".

At step 1209 positional data of the lamp's current position is stored, along with data defining the lamp's present dimmer setting.

At step 1210 a question is asked as to whether a "position-select" control signal has been received from the infrared detector. If such a signal has been received, then the micro-controller responds to the received "position-select" control signal at step 1211, before entering step 1212. Otherwise, the process enters step 1212 directly from step 1210. The step 1211 is similar to step 1106, and will be described in detail with respect to Figure 13.

At step 1212 a question is asked as to whether the timer has reached a pre-defined time. If the timer has reached the pre-defined time, this indicates that the operator 105 has not used the remote control unit 103 to adjust the lamp's settings within the pre-defined period, and step 1104 is exited. However, if the pre-defined time has not been reached by the timer then the process enters step 1213. At step 1213 a further question is asked to determine whether a "de-activate" control signal has been received indicating that the operator no longer requires the micro-controller to respond to control signals. If this is answered yes then the process exits step 1104, otherwise step 1202 is re-entered.

Figure 13

The step 1106 of responding to "position-select" control signals is shown in detail in *Figure 13*. Firstly within step 1106, at step 1301, the micro-processor receives "position-select" control signals from the infrared receiver which identify the memory location containing the required positional data and dimmer setting data. At step 1302 the stored positional data and dimmer setting data is retrieved from the memory location identified at step 1301. At step 1303, a question is asked as to whether the current position of the lamp is known. If this question is answered yes then step 1305 is entered directly, otherwise the process first enters step 1304. At step 1304, under the control of the micro-controller, drive signals are transmitted to the motors to move the lamp to the "home" position. The current position is then known since it is the "home" position. At step 1305, a calculation is made to determine the required movement to move the lamp from the current position to the required position, defined by the data retrieved at step 1302. At step 1306, under the control of the micro-controller, drive signals are transmitted to the motors to move the lamp to the required position.

In response to dimmer setting data retrieved at step 1302, the micro-controller transmits signals to the thyristor circuitry 1002 causing said circuitry to supply the required power to the lamp, thereby producing the required dimmer setting. Upon completion of step 1306, step 1106 is completed and the process re-enters step 1102.

Figure 14

It should be understood, that light is used to select a lamp because its visibility allows the narrow light beam to be accurately directed towards the

photodiode of the lighting units. However, once a lighting unit has been selected, it is then desirable for the radiation carrying the control signals to comprise of a wide beam so that operator accuracy is not necessary. In the main embodiment the wide beam of radiation was an infrared beam. However, in an alternative embodiment radio waves are used in place of infrared.

The main components of an alternative remote control unit to that of *Figure 4* are shown schematically in *Figure 14*. The remote control unit of *Figure 14* is substantially the same as that of *Figure 4*, except that the infrared LED 404 is replaced by a radio frequency generator 1401, a modulator circuit 1402 and an aerial 1403. The modulator circuit 1402 is configured to modulate a radio frequency signal received from radio frequency generator 1401 using control signals received from the micro-controller 401, and thus generate a modulated radio frequency signal. The radio frequency signal is then transmitted to lighting units via the aerial 1403.

Figure 15

The main electrical and electronic elements of an alternative lighting unit, suitable for receiving commands from the remote control unit of *Figure 14*, are shown schematically in *Figure 15*. The lighting unit of *Figure 15* is substantially the same as lighting unit 101, of *Figure 10*, except that the infrared receiver 706 is replaced by an aerial 1501 and a receiver circuit 1502. Thus, the components of the lighting unit of *Figure 15*, which are the same as those of *Figure 10* have been given the same numerical label.

The receiver circuit 1502 receives a modulated radio frequency signal from the aerial 1501, and from this signal it retrieves the modulating signal,

i.e. the control signal. The modulating signal is then transmitted to the micro-controller **1003**, where it is decoded.

Other operations of the remote control unit of *Figure 14* and the lighting unit of *Figure 15* are the same as the remote control unit **103** and lighting unit **101** respectively.

In a further alternative embodiment of the present invention, the lighting unit has a second individually moveable lamp and a corresponding second photodiode, connected to the micro-controller, for receiving the one kHz modulated light. The lighting unit enters its activated mode on receipt of the modulated light to either of its two photodiodes, but only the lamp corresponding to the receiving photodiode becomes selected. Thus, when activated, the lighting unit receives control signals from its infrared detector, and responds by moving, dimming etc. the lamp whose corresponding photodiode received the modulated light.

Therefore, like the lighting unit of the main embodiment, it is configured such that any of its independently moveable lamps may be selected by receipt of modulated light to a light sensor, and then orientated on receipt of control signals received in the form of coded infrared. This simplicity of operation is facilitated by the provision of a corresponding light sensor for each of the individually moveable lamps.

In a further alternative lighting system, said system also includes an alternative remote control device in addition to a remote control unit such as unit **201** or the remote control unit of *Figure 14*. The alternative remote control device is configured to transmit the "select-all" and "position-select" commands in the same manner as the remote control unit, ie by codes transmitted over a radio link or by infrared, as appropriate. However, the

device is also configured to be programmed to store a sequence of moves entered on its keypad, or received from a distant computer over a bus system. Once programmed, the alternative remote control device is configured to periodically transmit commands to the lighting units of the system, and thereby move the lighting units through the programmed sequence of movements, without any further human, or computer, input. The device may also be configured to transmit commands to the lighting units in response to commands it receives from a distant computer over a bus system.

Claims:

1. A lighting unit comprising:
a number of individually moveable lamps;
5 motor means configured to adjust the position of said lamps;
controlling means configured to transmit drive signals to said motor
means in dependence upon received control signals; and
for each one of said lamps, a corresponding light detector, connected
to said controlling means such that receipt of modulated light at one of said
10 light detectors provides an indication to said controlling means that the
position of the corresponding lamp is to be adjusted.
2. A lighting unit according to claim 1, wherein said unit further
comprises a radiation receiving means configured to receive coded radiation
15 and to generate said control signals in dependence upon received coded
radiation.
3. A lighting unit according to claim 2, wherein said coded
radiation comprises modulated infrared.
- 20 4. A lighting unit according to claim 2, wherein said coded
radiation comprises a modulated radio wave.
5. A lighting unit according to any of claims 1 to 4, wherein said
25 number of individually moveable lamps is one individually moveable lamp.

6. A lighting unit according to any of claims 1 to 5, wherein said lighting unit comprises an electrical connector for connecting said unit to a mains electricity supply.

5

7. A lighting unit according to any of claims 1 to 6, wherein said lighting unit comprises an electrical connector for connecting said lighting unit to a lighting track.

10

8. A lighting unit according to any of claims 1 to 7, wherein each of said light detectors responds to light modulated at the same particular frequency.

15

9. A lighting unit according to any of claims 1 to 8, further comprising a power control circuit for dimming one of said lamps, wherein said controlling means is configured to transmit signals to said power control circuit in dependence upon received control signals.

20

10. A lighting unit according to any of claims 1 to 9, further comprising:

position detecting means arranged to determine positional data defining the position of a lamp; and

storage means storing positional data defining specific positions of said lamp,

25

wherein said controlling means is arranged to:

(a) read selected positional data from said storage means in dependence upon a received position-select control signal; and

(b) transmit drive signals to said motor means such that the position of said lamp is brought into correspondence with said selected positional data.

5

11. A lighting unit according to claim 10, wherein said controlling means is configured to store positional data corresponding to the current position of a lamp in dependence of receiving a store-position control signal.

10

12. A lighting unit according to claim 10 or to claim 11, wherein said controlling means is configured to:

(a) receive a code identifying that a sequence of positions is required;

(b) read a plurality of sets of selected positional data from said storage means in dependence upon said received code; and

15

(c) transmit drive signals to said motor means such that the position of said lamp is brought into correspondence with each of said sets of selected positional data in a sequence.

20

13. A lighting unit according to any of claims 2 to 12, wherein said controlling means is configured to receive control signals from a radiation receiving means and to transmit drive signals to said motor means to adjust the position of each individually moveable lamp when said control signals include a select-all-lamps code.

25

14. A lighting unit according to any of claims 1 to 13, wherein said motor means and said controlling means are contained within a main body of

said lighting unit, said lighting unit further comprises a lighting track connector for connecting said lighting unit to a lighting track, and said motor means is configured to cause said main body to rotate with respect to said connector, and to cause said lamp to rotate with respect to said main body.

5

15. A lighting system comprising a plurality of lighting units according to any of claims 1 to 14, wherein the detectors on all of said lighting units respond to light modulated at the same frequency.

10

16. A lighting system comprising:

a lighting unit according to any of claims 2 to 14; and

a remote manual input device configured to transmit modulated laser light, and to transmit said coded radiation, whereby one of said lamps is selected by transmission of said laser light, and said selected lamp is moved by transmission of said coded radiation.

15

17. A lighting system comprising:

a lighting unit according to any of claims 2 to 14; and

a remote manual input device configured to transmit a modulated light beam upon receipt of a first user action, and to transmit said coded radiation upon receipt of a second user action, whereby one of said lamps is selected and moved by said two user actions only.

20

25

18. A lighting system comprising:

a lighting unit according to any of claims 2 to 14; and

a remote control device configured to store a set data defining a movement sequence, and to transmit corresponding position-select control signals at predefined periods, whereby said lighting unit is commanded to move said lamp through a sequence of movements..

5

19. A lighting system comprising a plurality of lighting units and a remote manual input device for controlling said lighting units, wherein each said lighting unit comprises:

10

a moveable lamp;

motor means configured to adjust the position of said lamp;

controlling means configured to transmit drive signals to said motor means in dependence upon received control signals; and

15

a light detecting means connected to said controlling means such that receipt of modulated light at said detecting means provides an indication to said controlling means that the position of said lamp is to be adjusted; and

20

wherein said remote manual input device is configured to transmit modulated light to a selected light detecting means upon receipt of a first user action, and to transmit said coded radiation upon receipt of a second user action, whereby the lamp of any of said lighting units is selectable and moveable by two user actions only.

20. A lighting unit comprising:


a lighting track connector for connecting said lighting unit to a lighting

25

track;

a main body rotatably connected to said lighting track connector; and
a lamp rotatably connected to said main body;

wherein said main body contains: motor means configured to cause
said main body to rotate with respect to said connector, and to cause said
5 lamp to rotate with respect to said main body; and controlling means
configured to transmit drive signals to said motor means in dependence upon
received control signals.

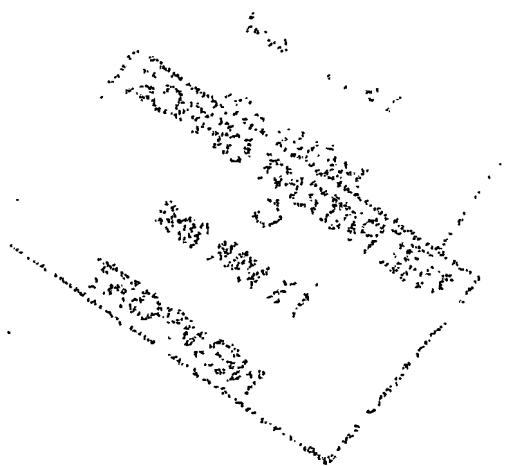

1/14

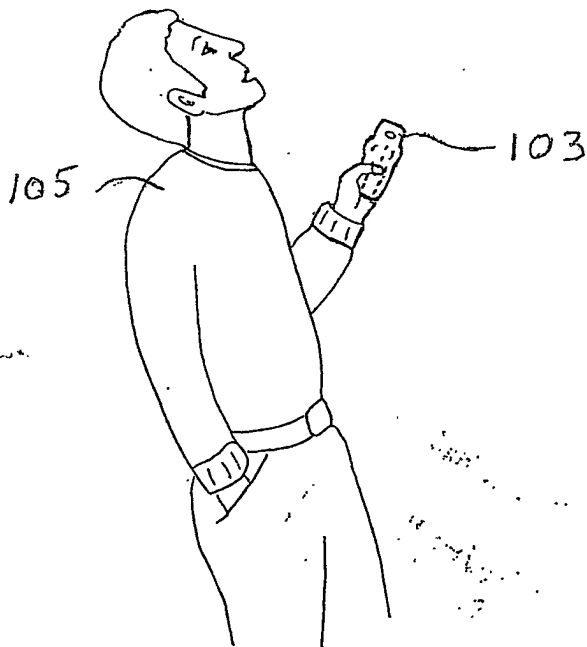
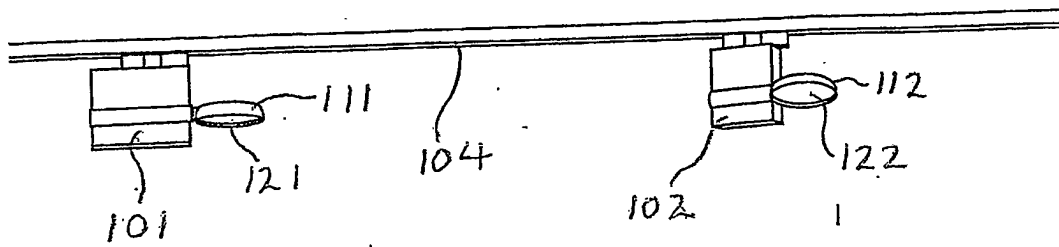


Figure 1

2/14

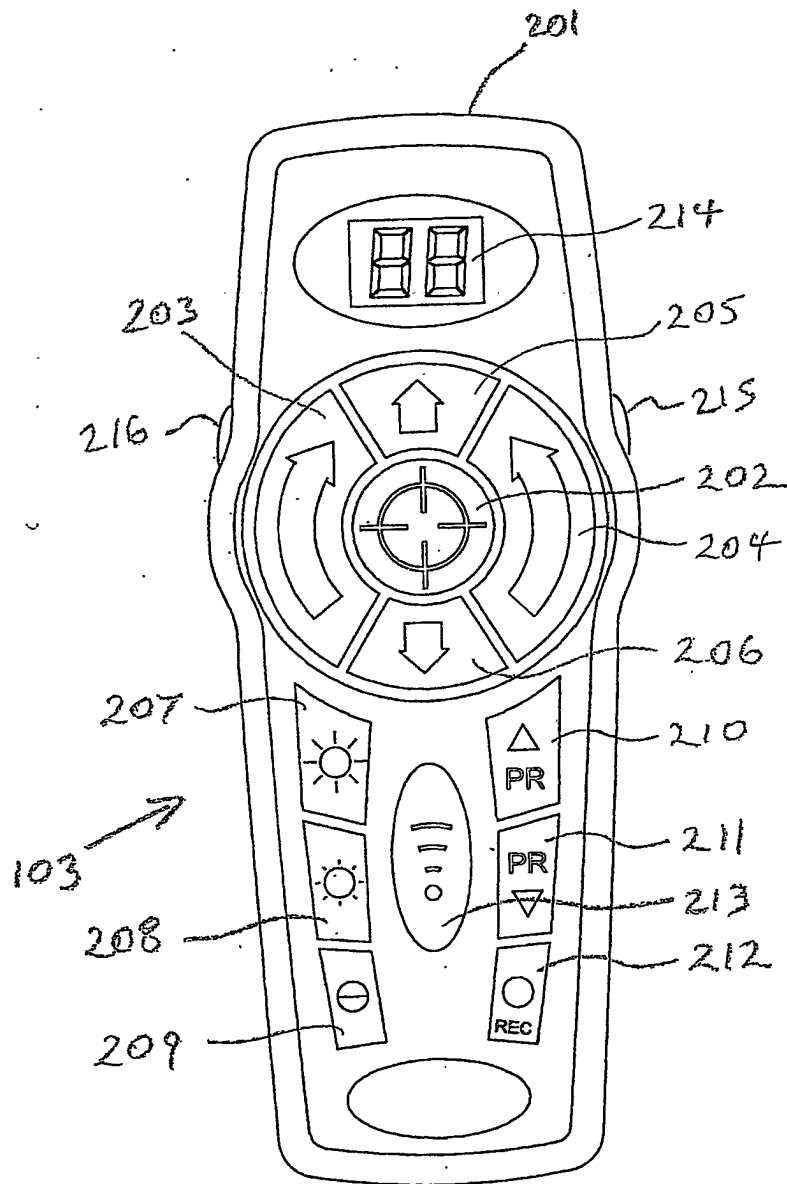


Figure 2

3/14

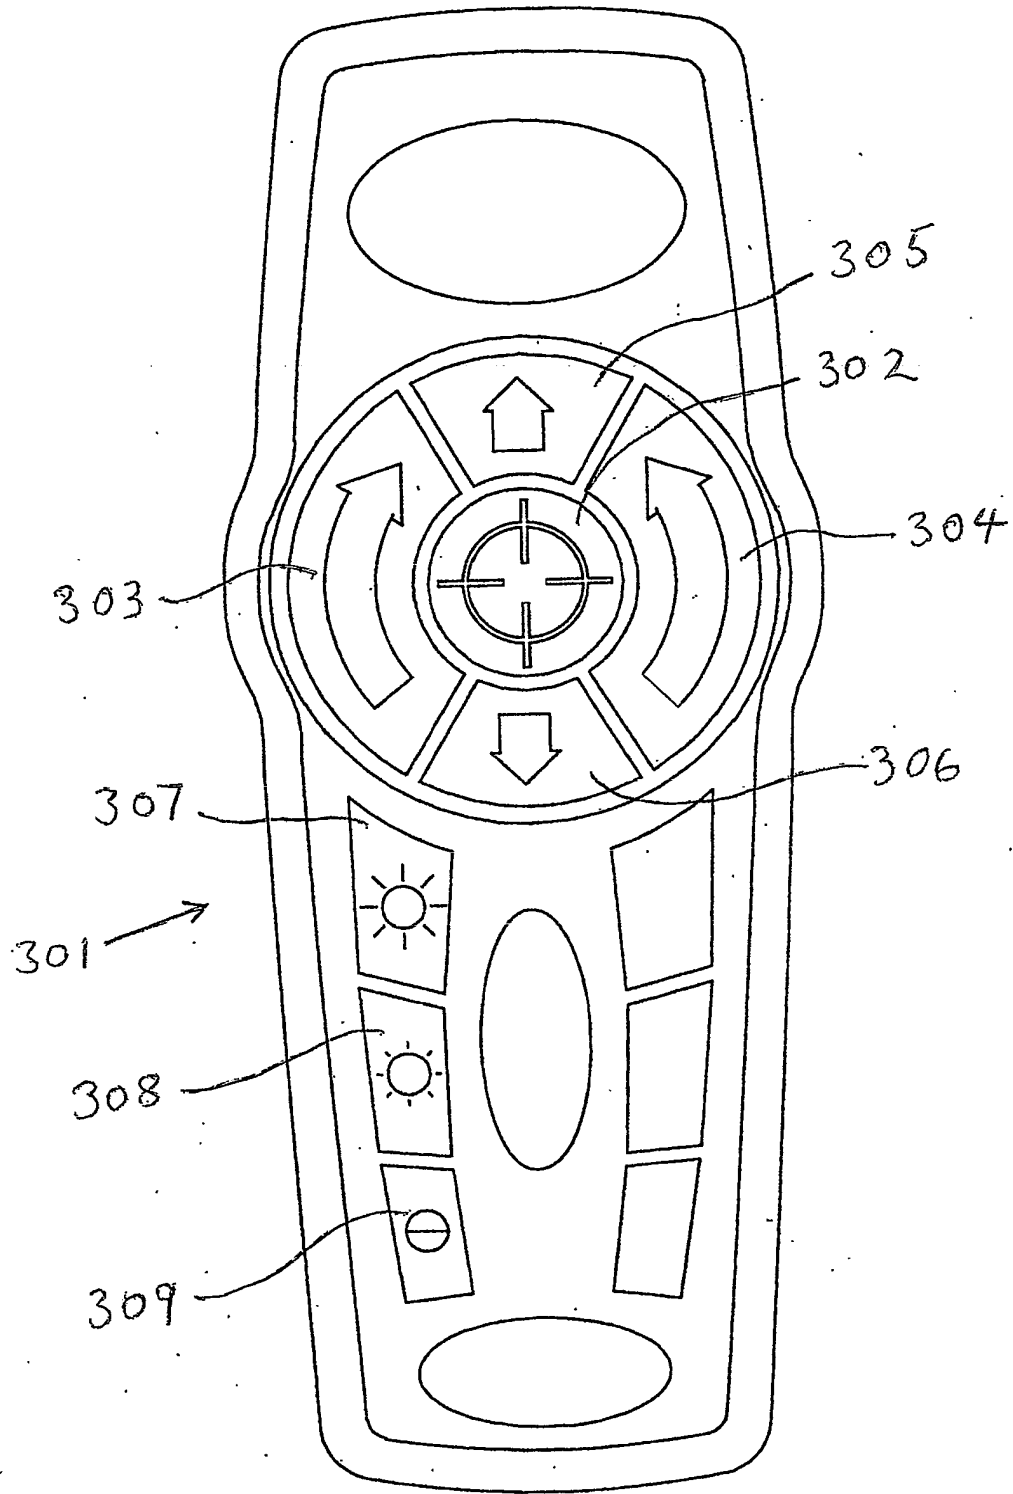


Figure 3

4/14

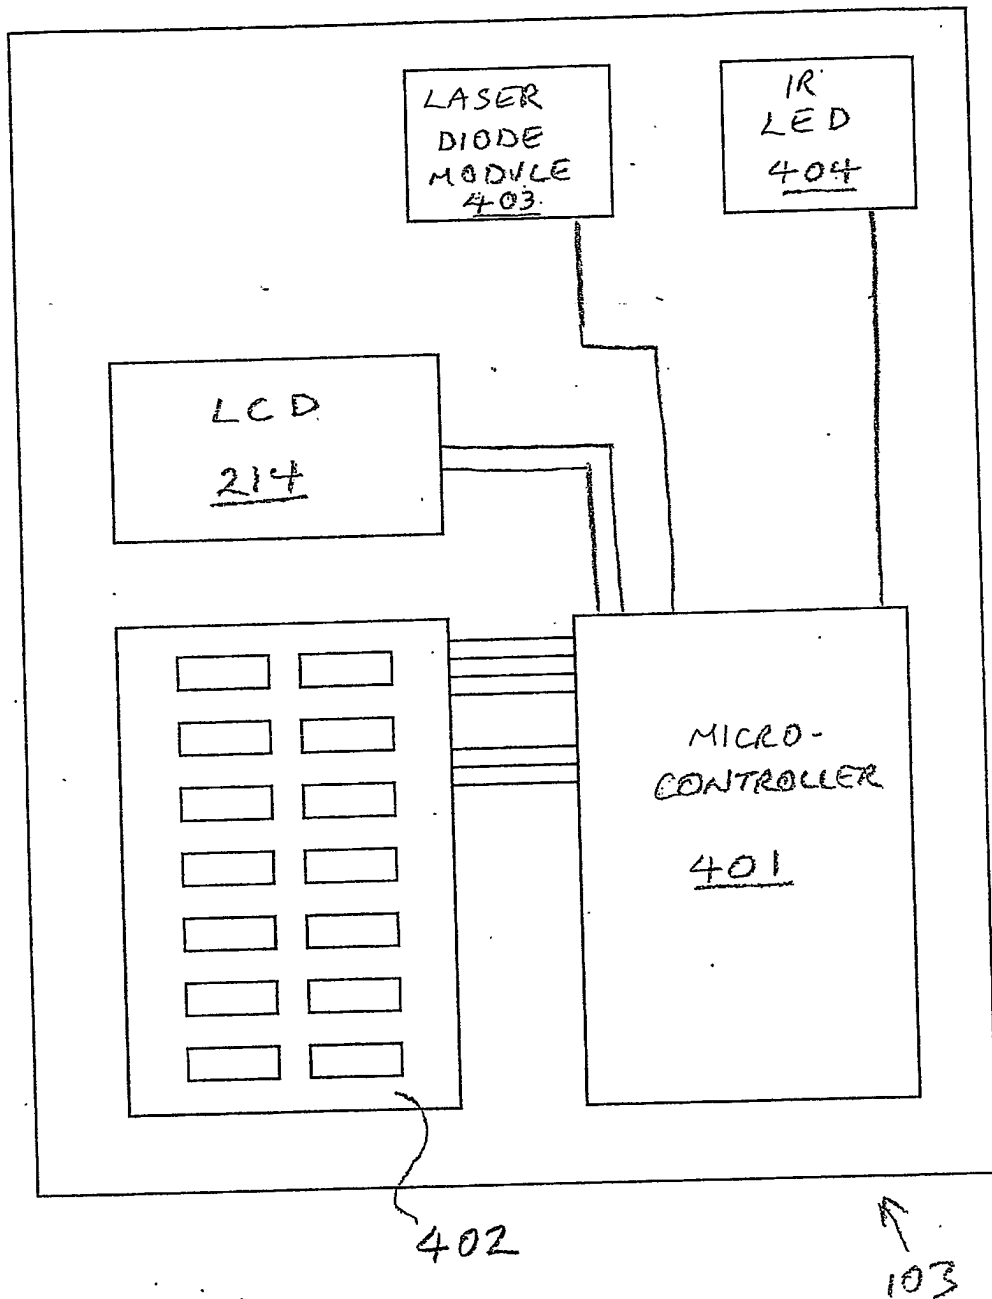


Figure 4

5/14

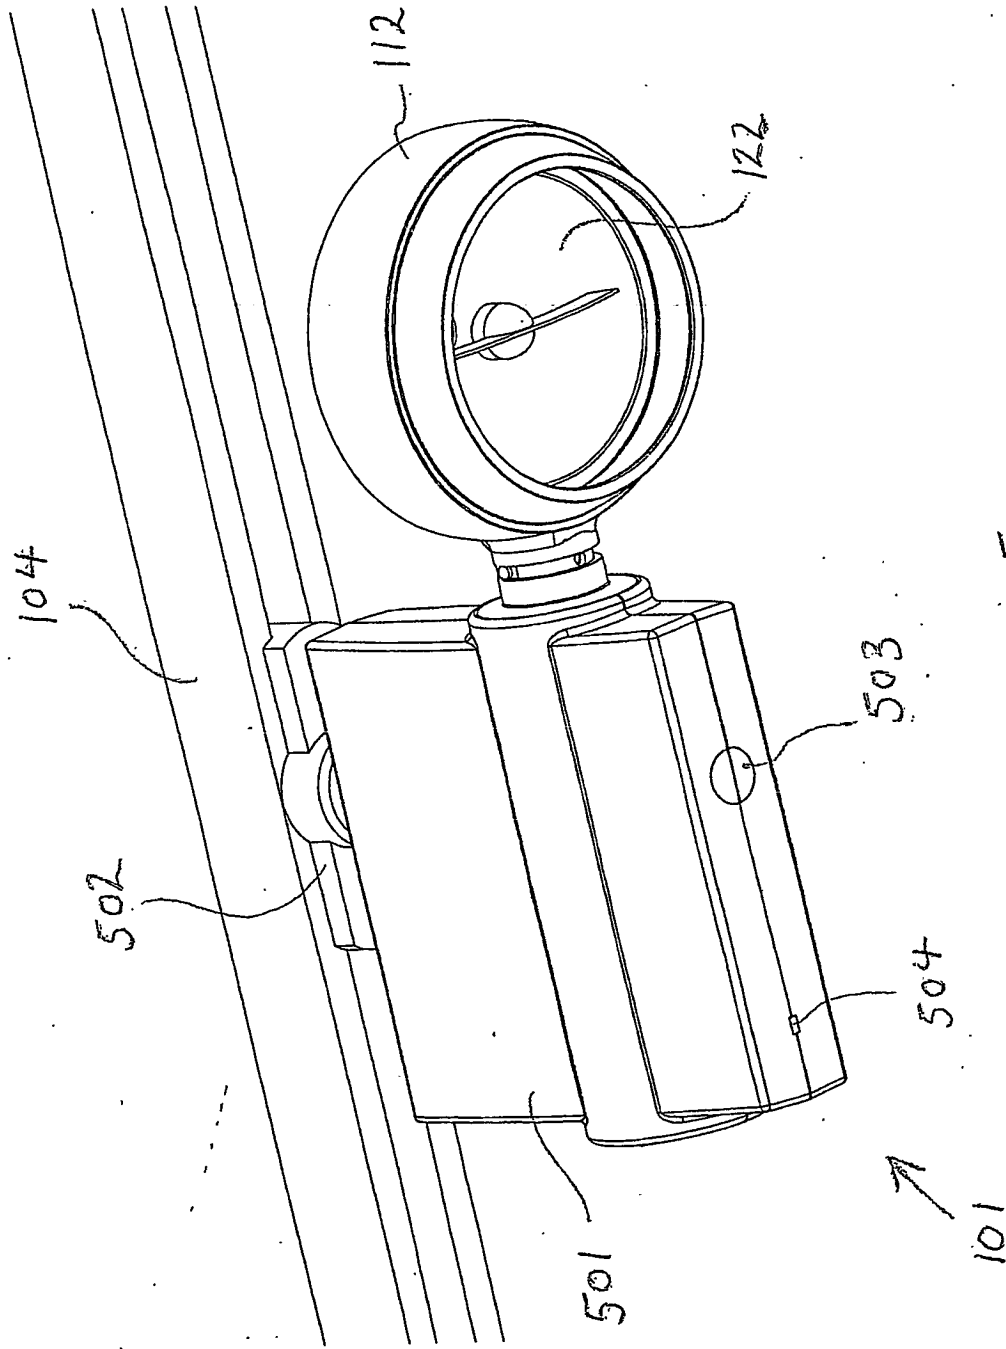


Figure 5

6/14

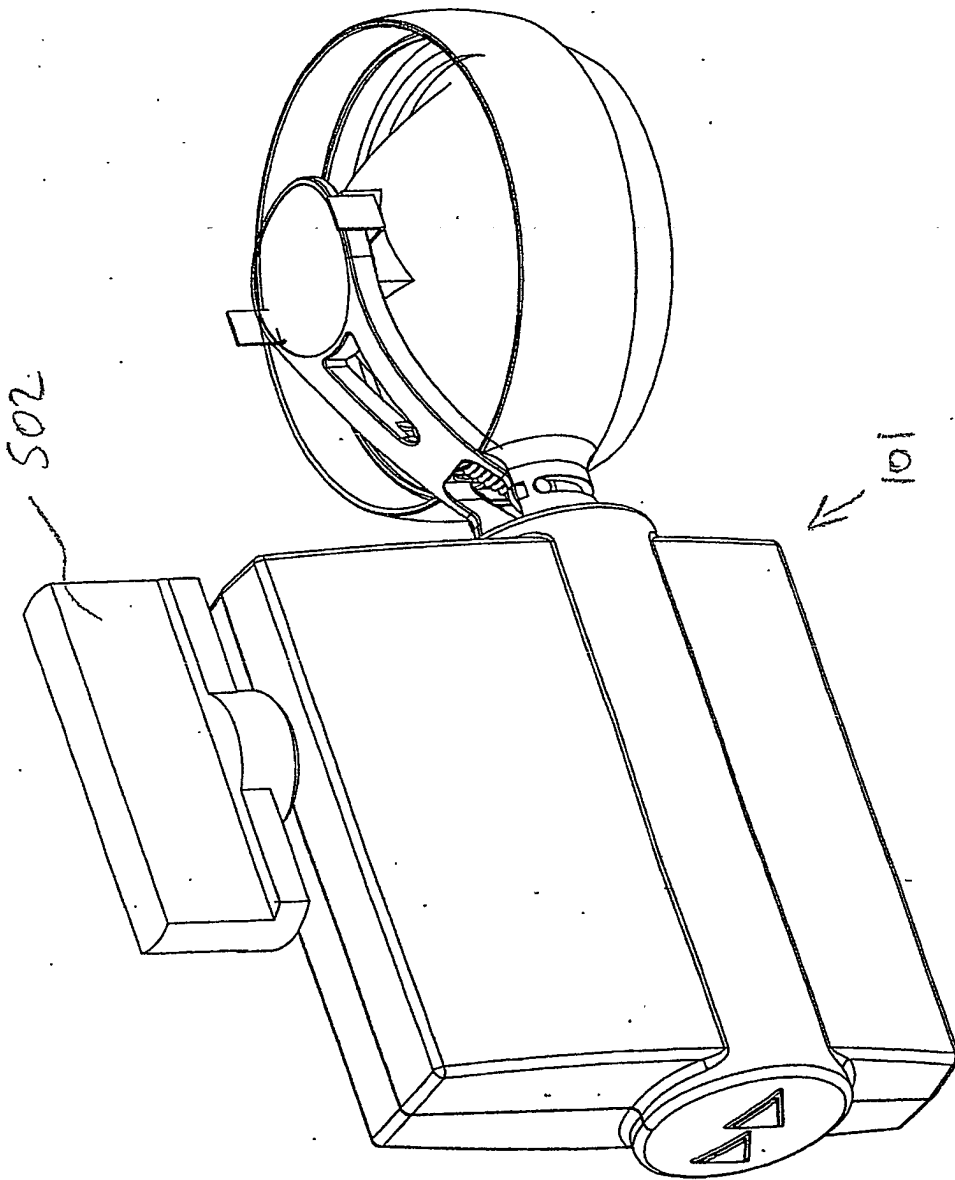


Figure 6

7/14

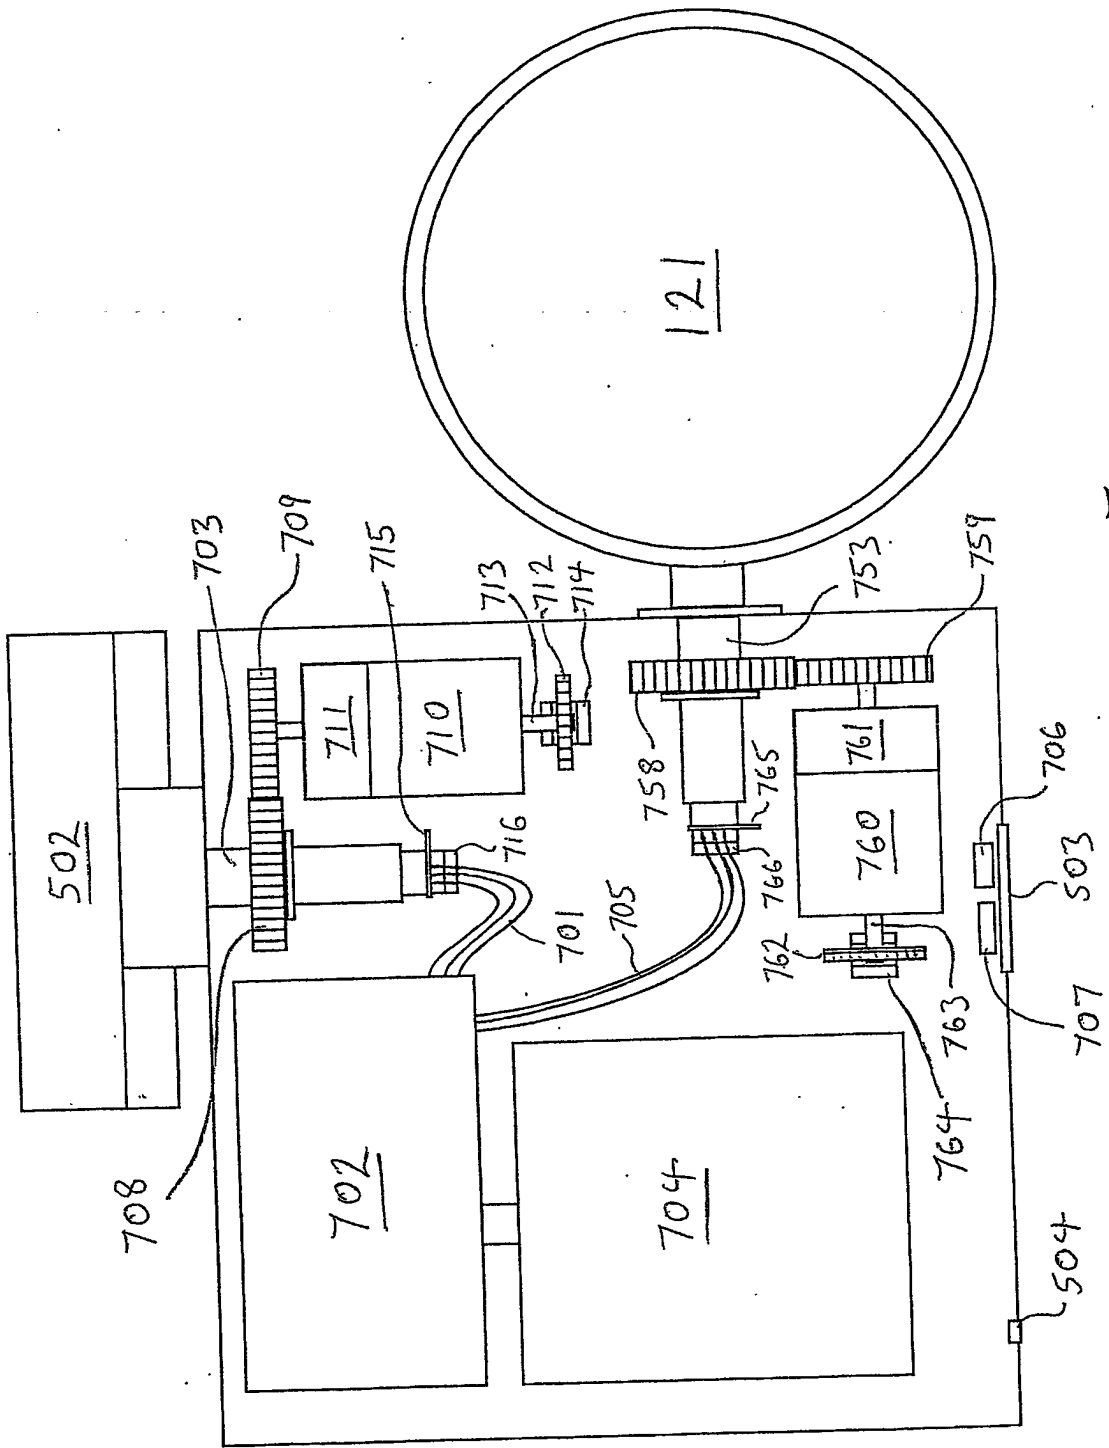


Figure 7

8/14

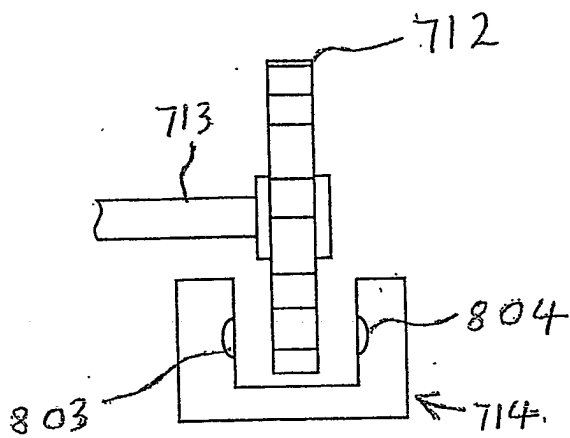


Figure 8A

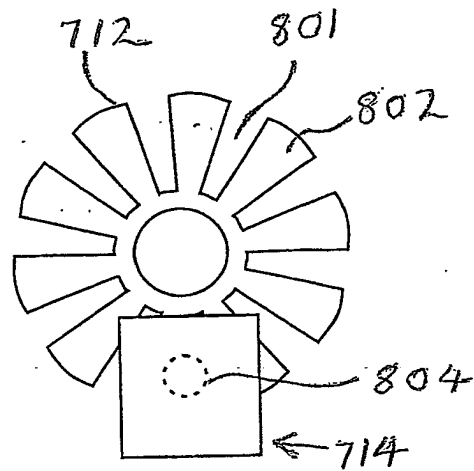


Figure 8B

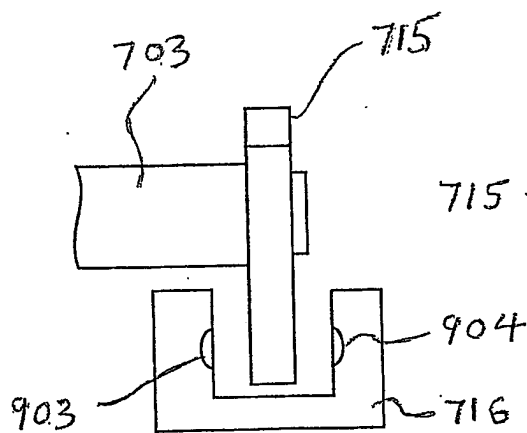


Figure 9A

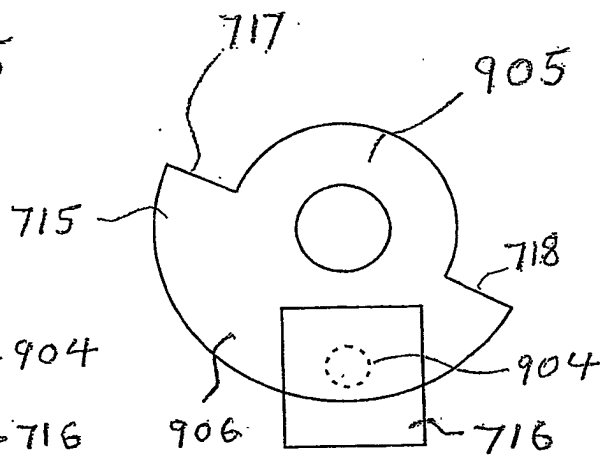


Figure 9B

9/14

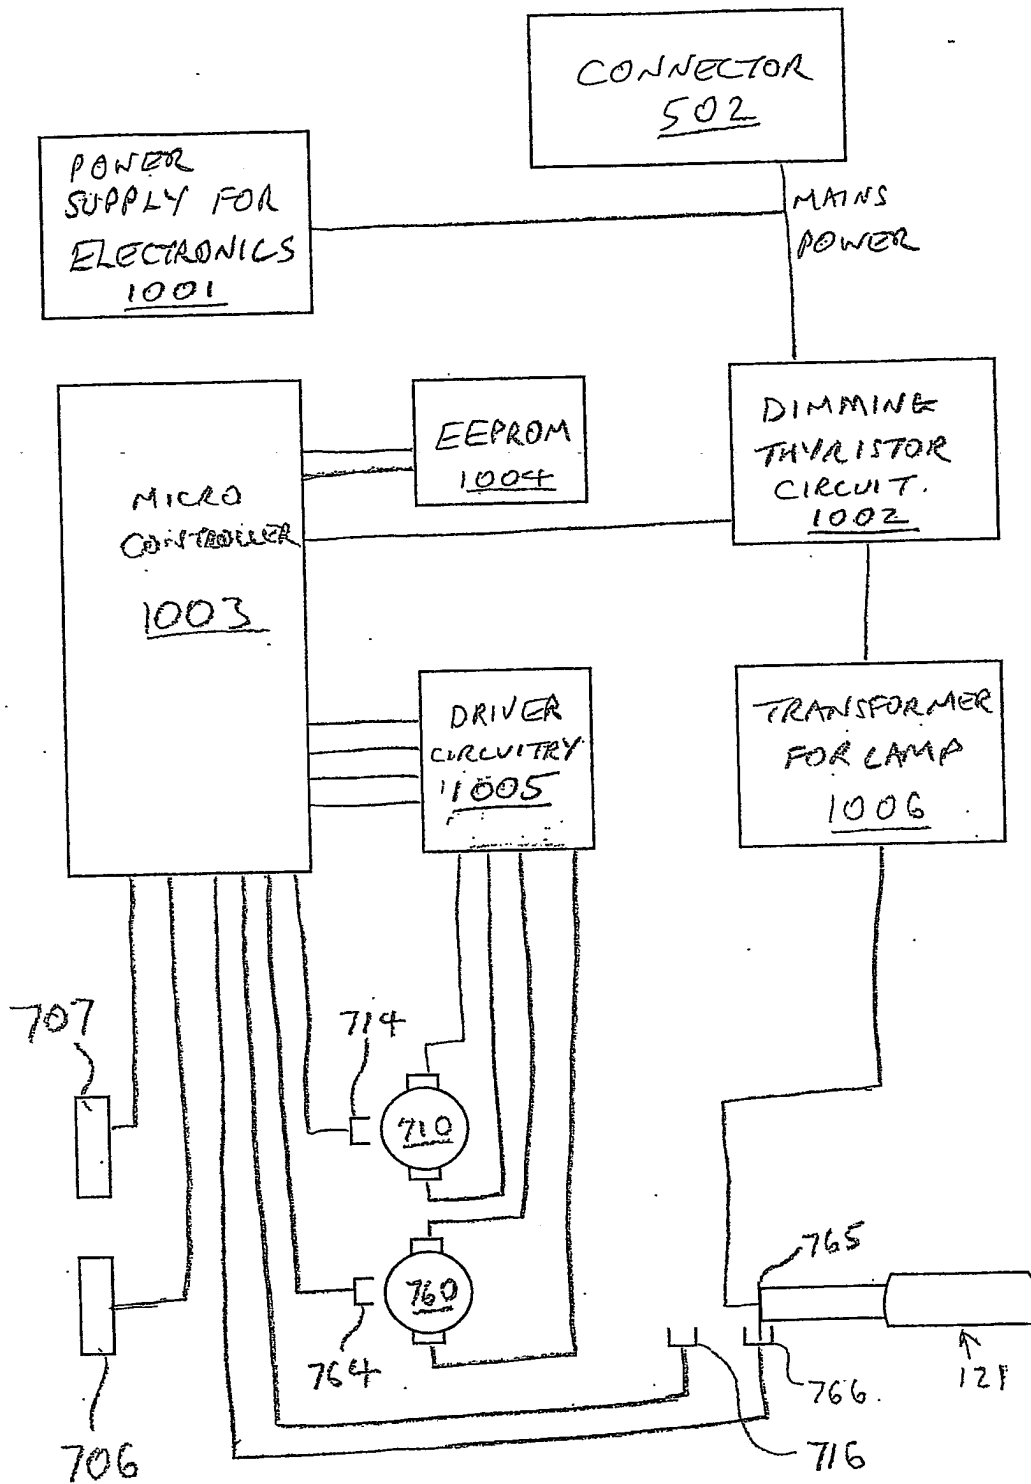


Figure 10

10/14

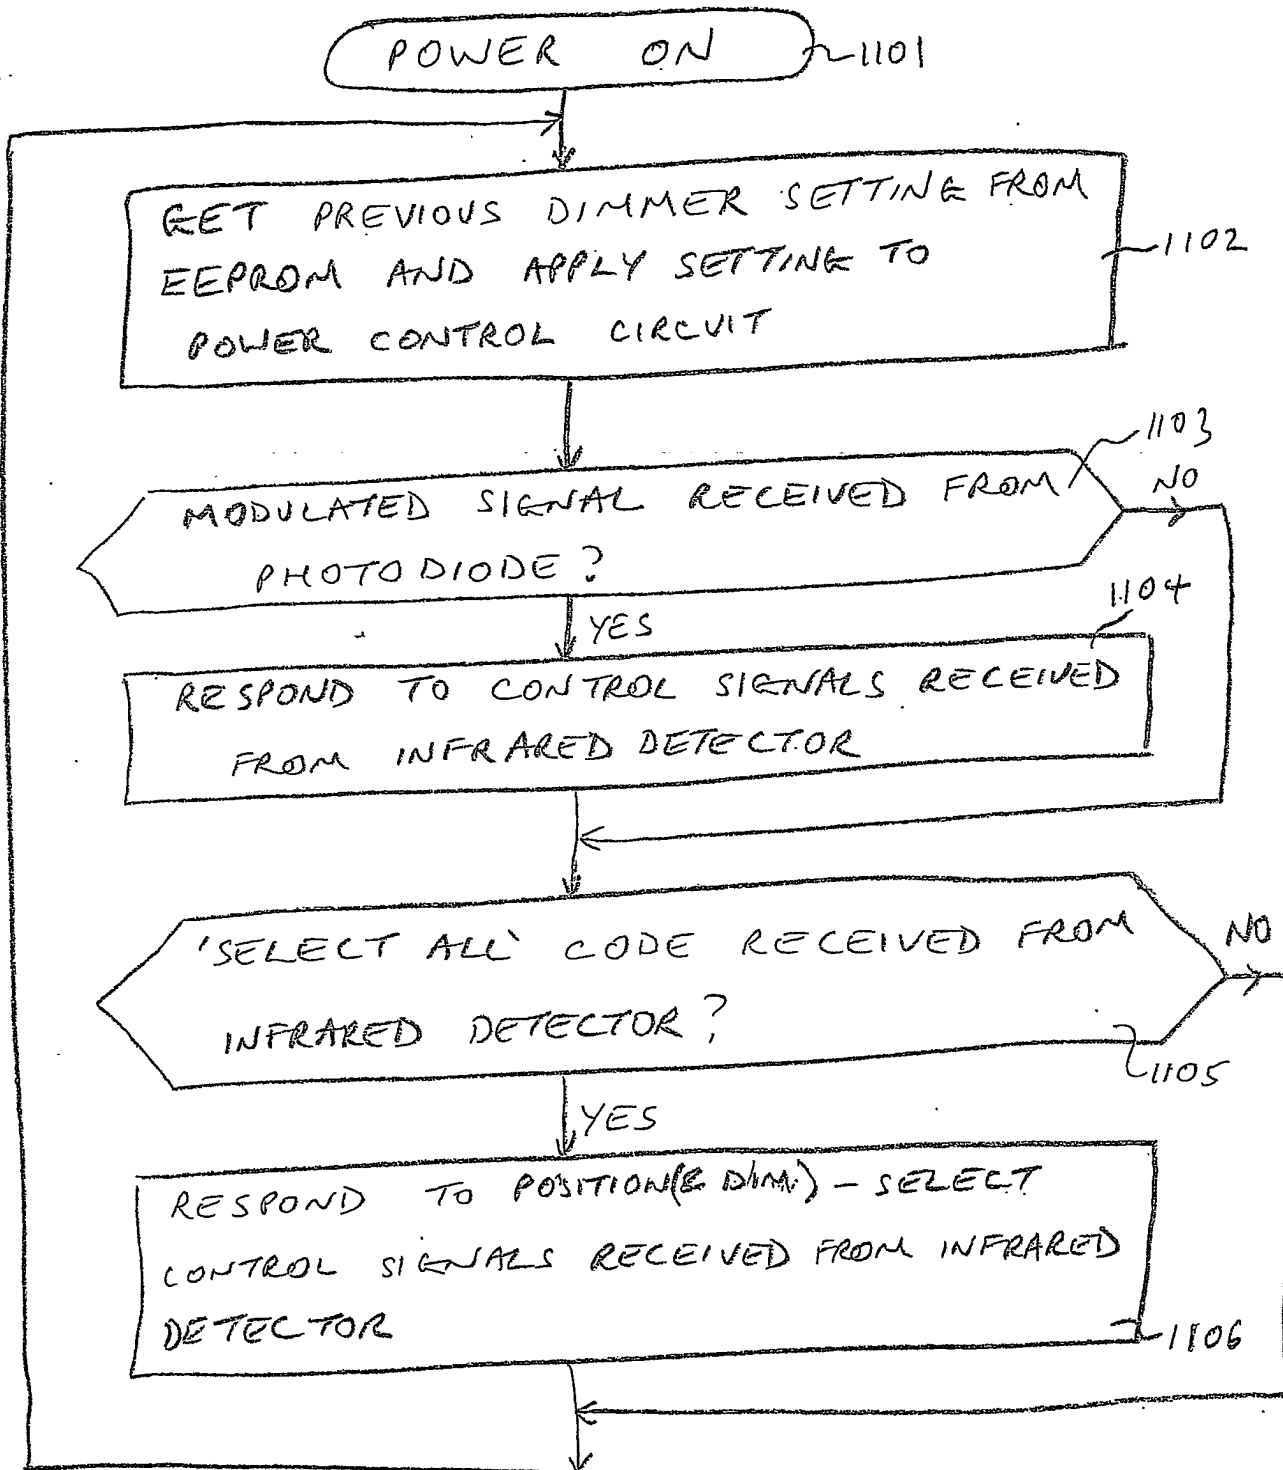


Figure 11

11/14

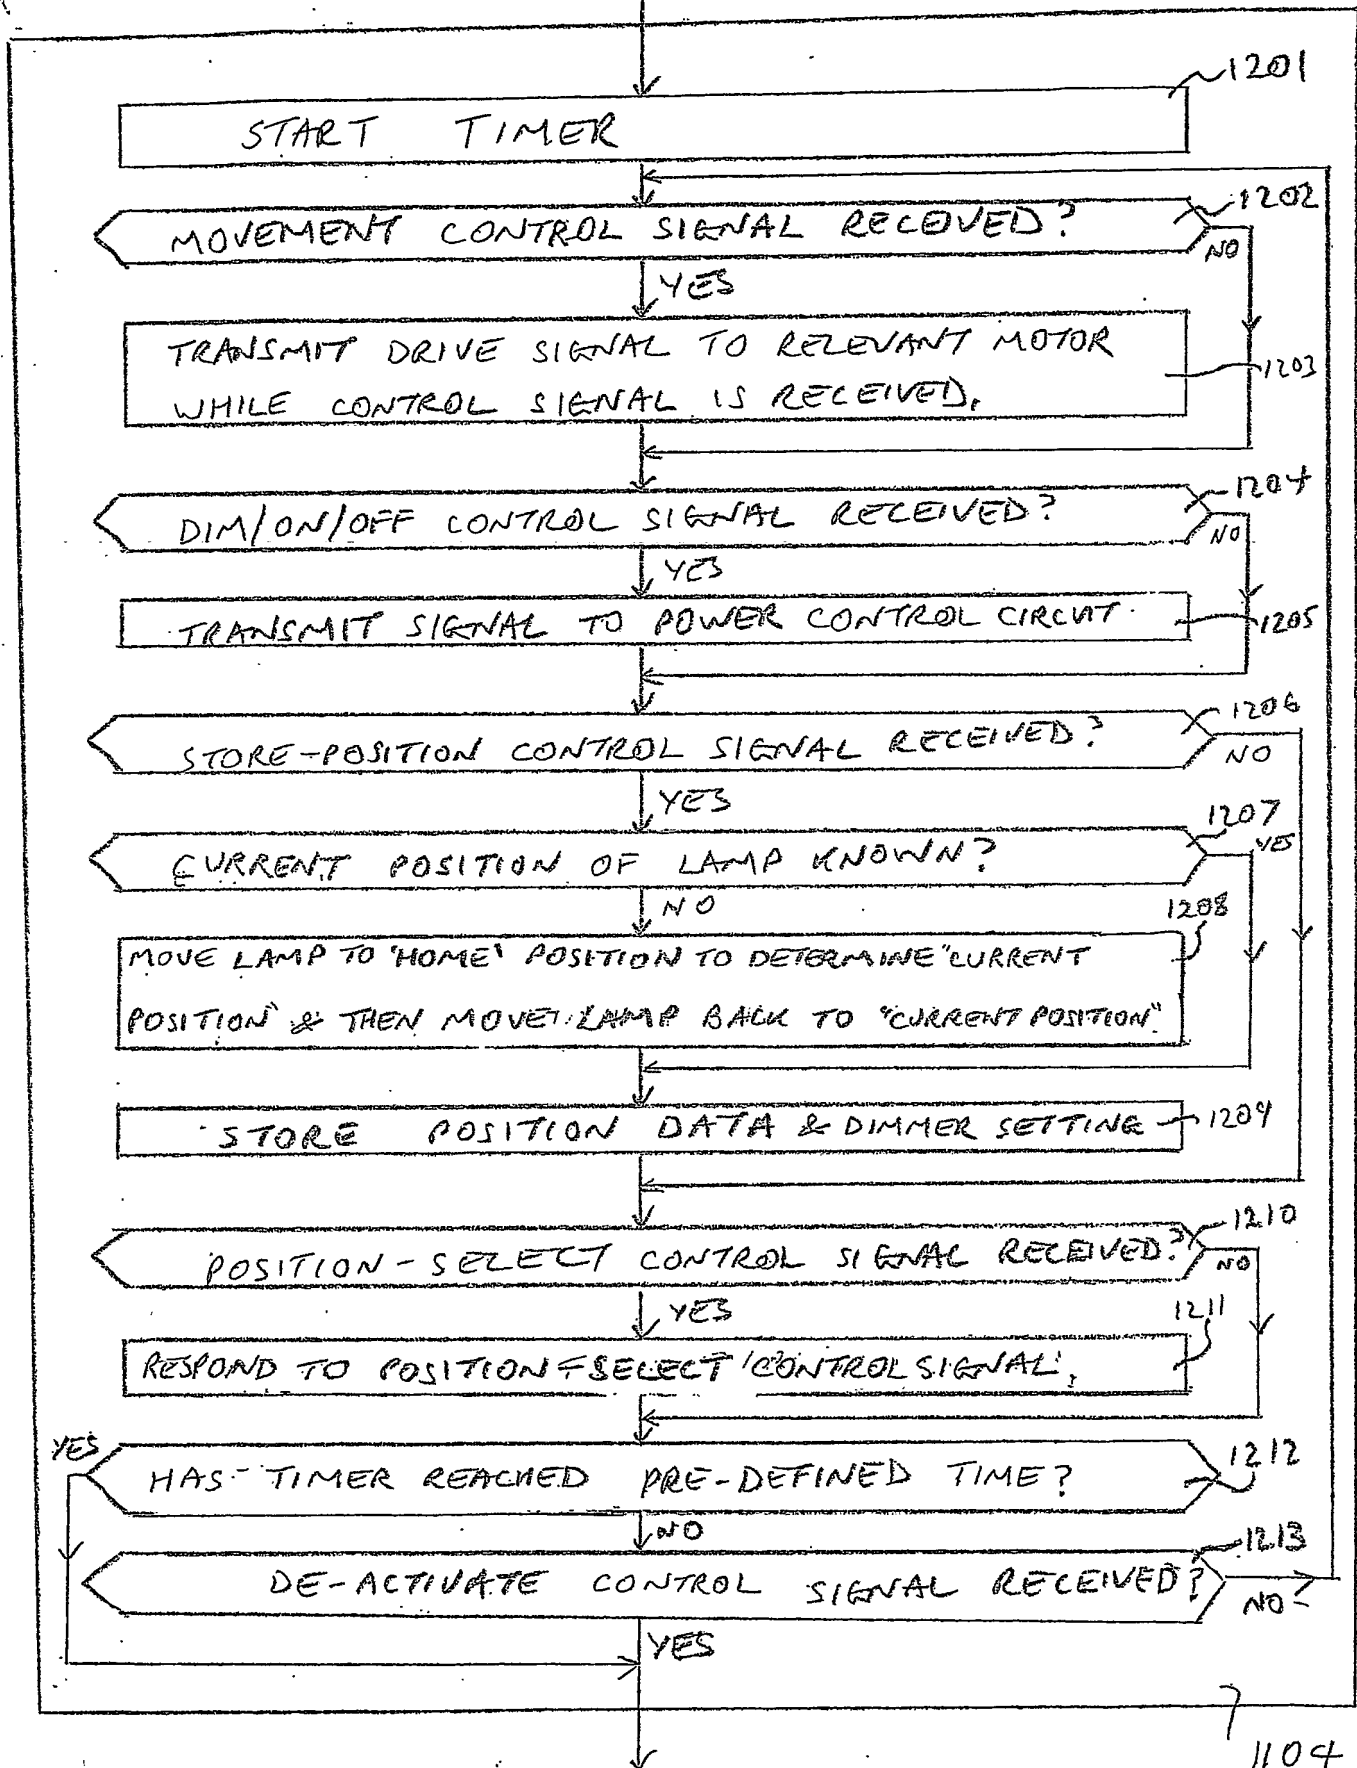


Figure 12

12/14

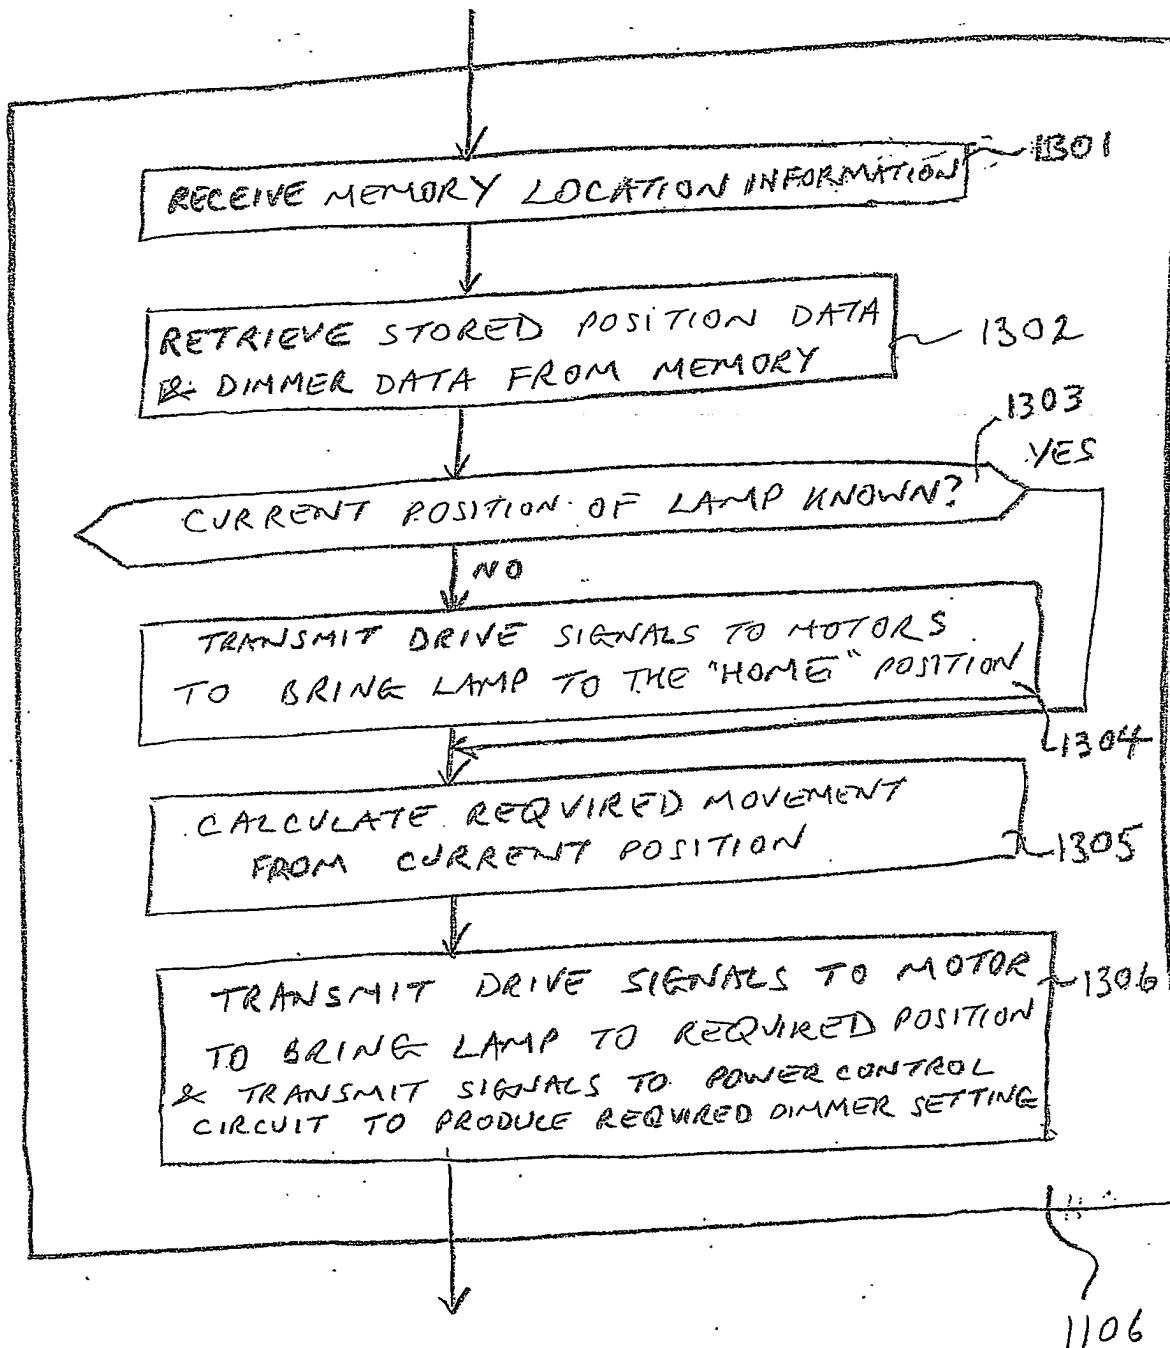


Figure 13

A block diagram of a system 402, enclosed in a large rectangle. The system includes the following components and connections:

- LCD 214**: A rectangular block on the left side.
- KEYBOARD 216**: A block below the LCD, represented by a grid of 16 small rectangles (2 columns by 8 rows).
- MICRO CONTROLLER 401**: A large rectangular block on the right side.
- R.F. GENERATOR 1401**: A rectangular block above the microcontroller.
- MODULATOR 1402**: A rectangular block to the right of the R.F. generator.
- LASER DIODE MODULE 403**: A rectangular block at the top center.

Connections are shown as follows:

- The **LCD 214** and **KEYBOARD 216** are connected to the **MICRO CONTROLLER 401** via a single line.
- The **MICRO CONTROLLER 401** is connected to the **R.F. GENERATOR 1401** via a single line.
- The **R.F. GENERATOR 1401** is connected to the **MODULATOR 1402** via a single line.
- The **MODULATOR 1402** is connected to the **LASER DIODE MODULE 403** via a single line.
- The **LASER DIODE MODULE 403** is connected back to the **MICRO CONTROLLER 401** via a single line.

Figure 14

14/14

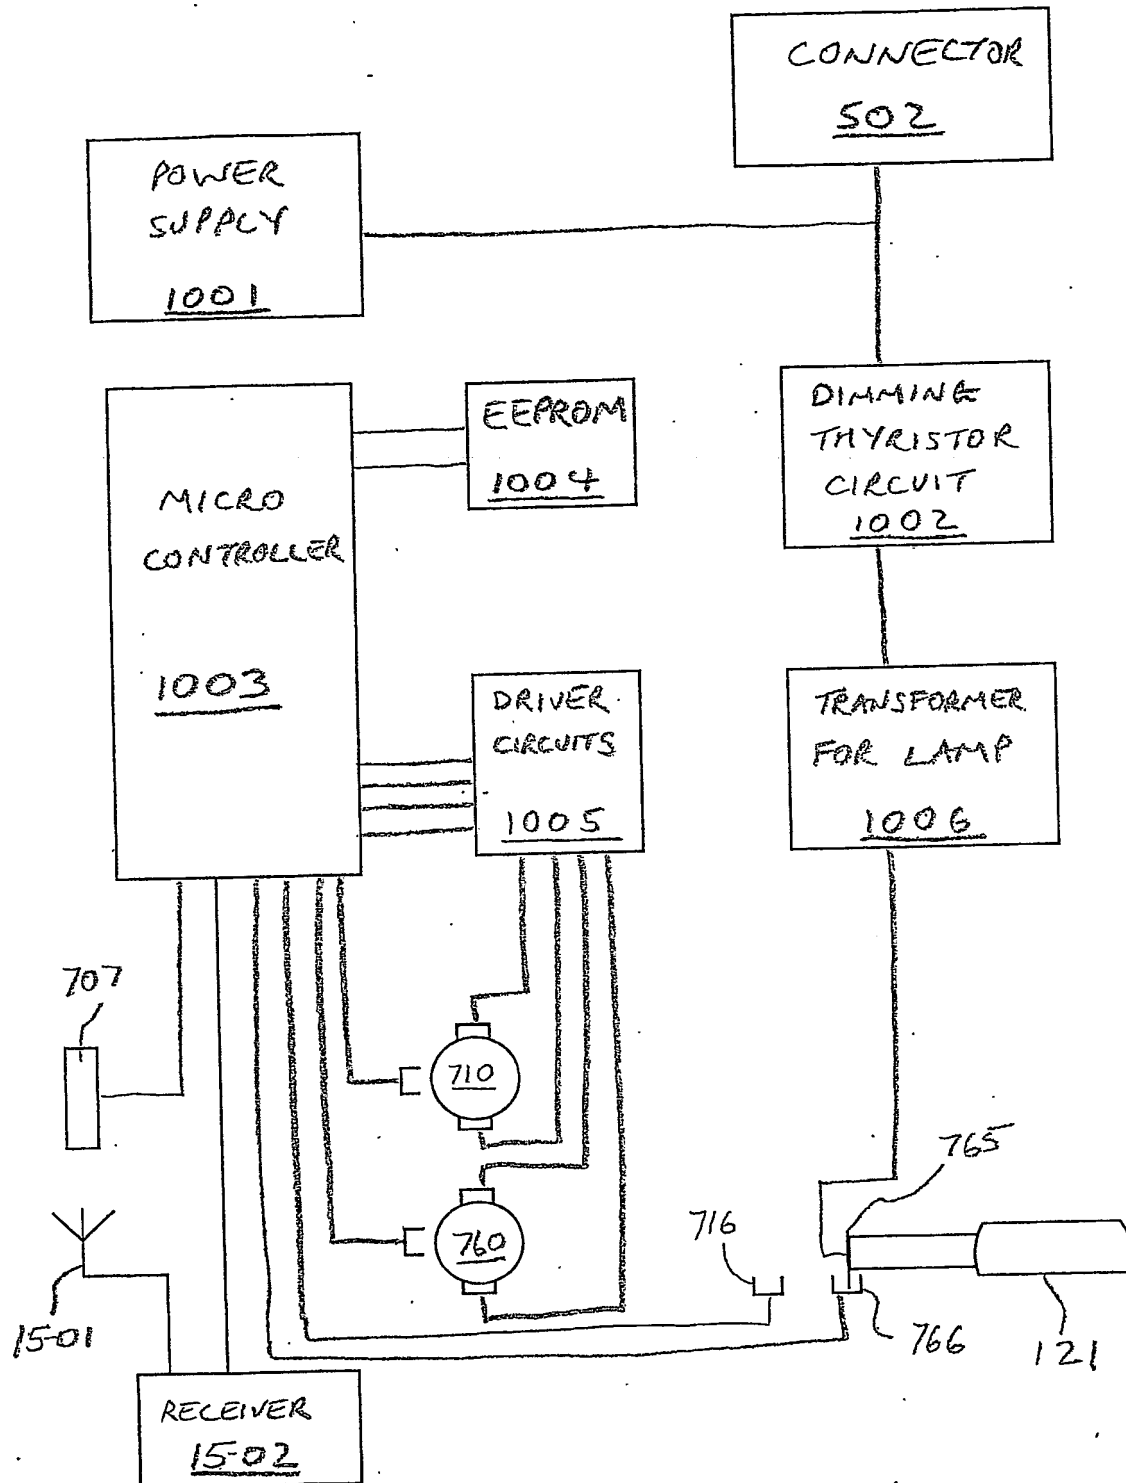


Figure 15